

Waterproof Price Computing Bench Scale

# EBW series



## Waterproof Price Computing Bench Scale

EBW, Waterproof Price Computing Bench Scale is suitable for usage in agricultural and fish markets with IP66·67 rating water/dustproof structure.

Also, it features large LCD display with 24 mm character height and enlarged Key so that user can easily check the display information and operate the scale.



IP66·67 Waterproof structure



Large and clear display



Long battery operation



Fast & accurate weighing

# CAS



# EBW series

# Waterproof Price Computing Bench Scale

### Large & clear display


Easy to Check display information via Large LCD with 24mm Character Height

- ▶ 5/6/7/5 digits  
(Weight/Unit Price/Total Price /Tare )
- ▶ Equipped with backlight



### Large key for easy operation

12 Direct PLU keys, 12 Numeric keys, 8 Function keys

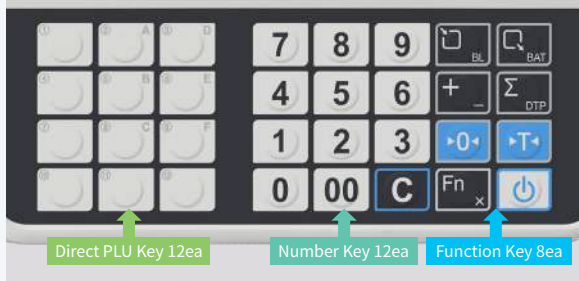

### Long battery operation


- Built-in 7.3V 6Ah Li-ion battery
- Dual Display : 300hours (Backlight off)



EBW-15/30AS  
(Round shape post pipe)



EBW-60/150AD  
(Square shape post pipe)

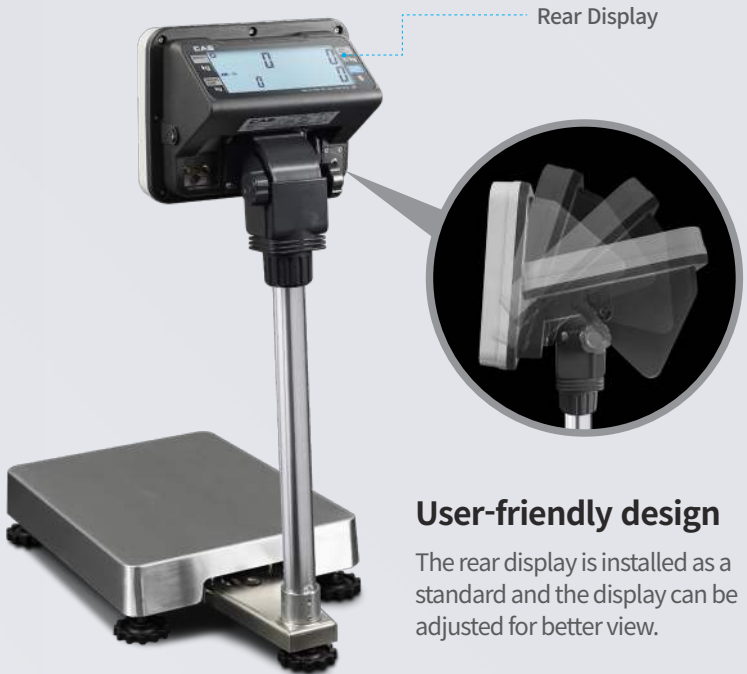


### User-friendly design

The rear display is installed as a standard and the display can be adjusted for better view.

### Various platforms and post pipes

Two types of platforms are applied depending on capacity. Users can choose between round and square shape post pipe.

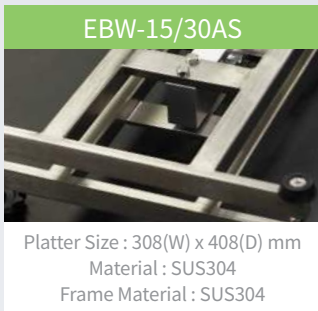

EBW-15/30AS

Platter Size : 308(W) x 408(D) mm  
Material : SUS304  
Frame Material : SUS304



EBW-60/150AD

Platter Size : 406(W) x 530(D) mm  
Material : SUS304  
Frame Material : Aluminium die casting

### IP66·67 water/dustproof structure



IP66·67 water/dustproof structure allows reliable use in humid environments such as agricultural and fish markets.

### Fast & accurate weighing



EBW is equipped with CAS One-chip which guarantees fast and accurate weighing performance.

### Specifications

Model	EBW-AS		EBW-AD	
Capacity (kg)	15	30	60	150
Readability (kg)	0.002	0.005	0.01	0.02
Resolution	1/6,000 ~ 7,500			
Display	LCD Display Digit and Character height : Weight-5digits 24mm / Unit price - 6digits 24mm / Total Price - 7digits 24mm / Tare - 5digits 16mm			
Key	12 Direct PLUs, 12 Numeric keys, 8 Function Keys			
PLU memory	200ea(Direct PLU : 12ea, Indirect PLU : 188ea)			
IP rating	IP66-67			
Power	7.3V 6Ah Li-ion battery & DC9V 1A adaptor (Adaptor cable length : Standard -1.8m(Option : 3m extension)			
Battery time	300hours(Dual display, Backlight off)			
Interface	Option : RS-232C, BLE, 3m Power extension cable			
Operating temp. (°C)	-10 ~ +40			
Platter size (mm)	300(W) x 400(D)		400(W) x 520(D)	
Platter material	SUS304			
Product size (mm)	324(W) x 562(D) x 674(H)		421(W) x 651(D) x 790(H)	
Product weight (kg)	8.8		13.5	

## Product line-up / dimension



**A** EBW-15/30AS  
(Round shape post pipe)



**B** EBW-60/150AD  
(Round shape post pipe)




**C** EBW-15/30AS  
(Square shape post pipe)



**D** EBW-60/150AD  
(Square shape post pipe)

## Features

- IP66 · 67 water/dustproof structure
- Large bright LCD display with 24mm of character height
- Large size key (Button)
- Fast and Accurate performance
  - Approved Resolution : 1/6,000~7,500
- Long battery operation
  - Dual Display : 300 hours (Backlight off)
- PLU Memory : 200ea
  - Direct PLU : 12ea / Indirect PLU : 188ea
- Interface
  - Option : RS-232C, BLE

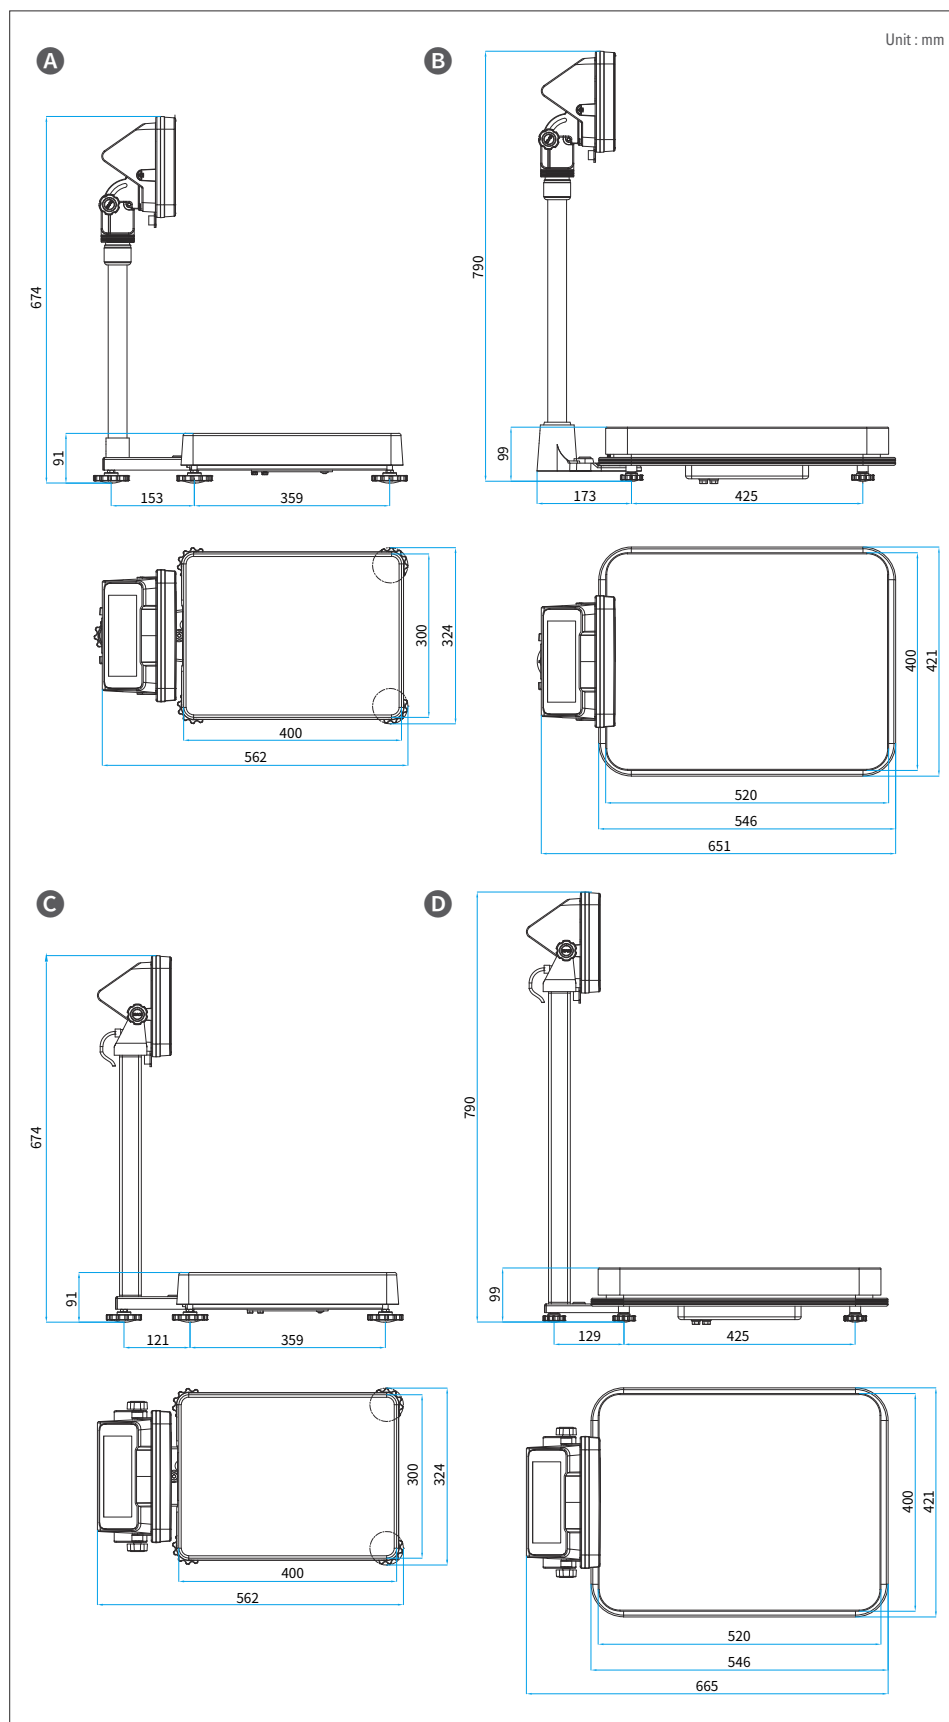

Ver. 1.1\_32504202



CAS Global Homepage

## CAS Co., Ltd

Headquarters : 262, Geurugogae-ro, Gwangjeok-myeon, Yangju-si, Gyeonggi-do, Korea

Seoul Office : CAS Building, 1315, Yangjae-daero, Gangdong-gu, Seoul, Korea

TEL : 82 2 2225 3500 FAX : 82 2 475 4668

www.globalcas.com



\* Specifications are subject to change without notice improvement.

